




UniBanner IN2.6

- 1000nit brightness, stay bright in ambient lighting
- Ultra thin 42mm, space saving, a real digital wallpaper
- Cabinet can be installed horizontally or vertically
- Cut corner design, seamless splicing into a right-angle display
- Customizable screen following the column size

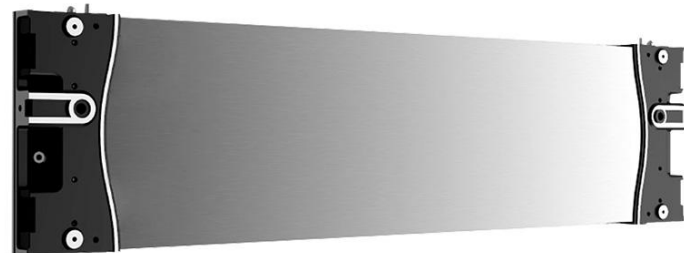

Technical Specifications

Pixel Pitch	2.604mm
Pixel Configuration	SMD2020
Brightness	1000nit
LED Module Size WxH	250x250mm
Typical LED Cabinet Size WxHxD	1000x250x42mm (750x500mm, 500x500mm)
Typical Cabinet Resolution	384x96 (1000x250mm cabinet)
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	2.6-8m
Cabinet Material	Die-casting aluminum
Cabinet Weight	26kg/sqm
Protection grade	IP45
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	3840Hz
Power Consumption	Max 550W/sqm, Typical 165W/sqm
Storage Temperature / Humidity	-30~+60 °C, 10~95%RH
Operating Temperature / Humidity	-20~+50 °C, 10~90%RH
Maintenance	Front service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair