


# UniDisplay EX2.5

- 6000nit brightness, 24/7 non-stop working day and night
- Full pixel pitch options for different budget
- Curved, right angled, multiple sizes cabinet customizable
- IP65 waterproof, get ready for harsh environment

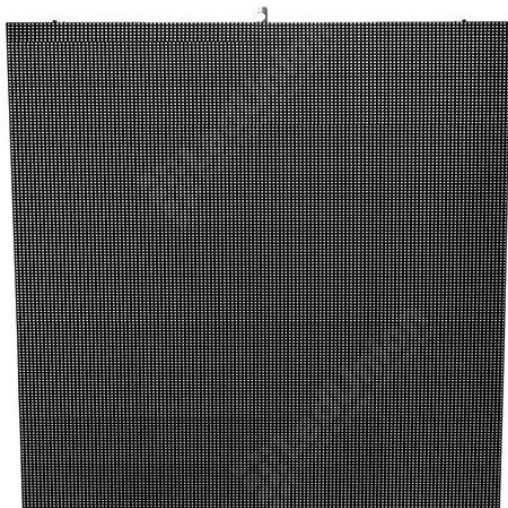

## Technical Specifications

Pixel Pitch	2.5mm
Pixel Configuration	SMD1415
Brightness	6000nit
LED Module Size WxH	320x160mm
Typical LED Cabinet Size WxHxD	960x960x150mm (customizable)
Typical Cabinet Resolution	384x384
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	2.5-8m
Cabinet Material	Steel or Aluminum
Cabinet Weight	42kg or 37kg
Protection grade	IP65
Color Temperature	2000-9500K Adjustable
Grey Scale	14bit
Contrast Ratio	3000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920 / 3840Hz
Power Consumption	Max 690W, Typical 210W
Storage Temperature / Humidity	-30~+60 °C, 10~95%RH
Operating Temperature / Humidity	-30~+60 °C, 10~95%RH
Maintenance	Rear Service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair