



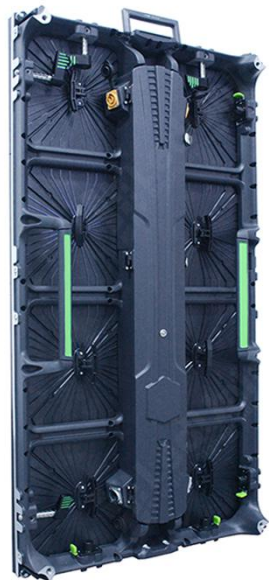

UniCube P4.8

- Max 2500nit brightness, always bright in ambient lighting
- 3840Hz refresh rate, silky smooth image under camera
- 28kg/sqm only, no pressure on hoisting structure
- Strong cabinet locks, max hanging 20pcs vertically
- Quick service LED module and power box, 30s to replace

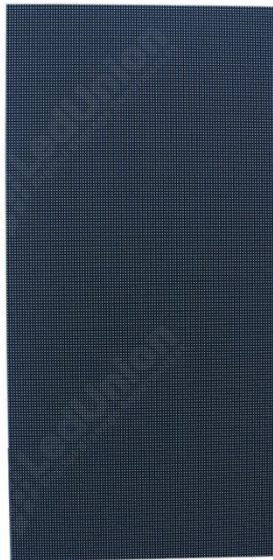

Technical Specifications

Pixel Pitch	4.81mm
Pixel Configuration	SMD1921
Brightness	2500nit adjustable
LED Module Size WxH	250x250mm
LED Cabinet Size WxHxD	500x1000x88mm (500x500mm option)
Cabinet Resolution	104x208
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	5-15m
Cabinet Material	Die-casting aluminum
Cabinet Weight	28kg/sqm
Protection grade	IP45
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	3840Hz
Power Consumption	Max 650W/sqm, Typical 200W/sqm
Storage Temperature / Humidity	-30~+60 °C, 10~95%RH
Operating Temperature / Humidity	-20~+50 °C, 10~90%RH
Maintenance	Front or rear service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair