



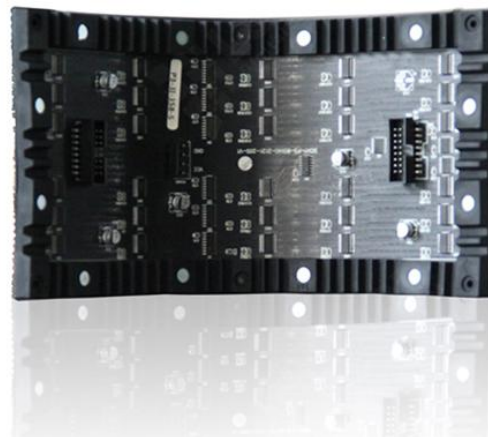

UniFlex P1.5

- 800nit brightness, always bright in ambient lighting
- 1.5~5mm pixel pitch for option
- Magnetic soft module, easily mount to any shaped structure
- 5000:1 high contrast ratio, show perfect colors to customers
- 100g only per module, do not add weight to buildings

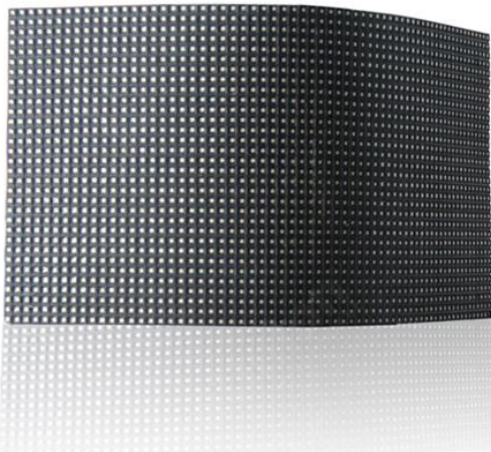

Technical Specifications

Pixel Pitch	1.56mm
Pixel Configuration	SMD1515
Brightness	800nit
LED Module Size WxH (mm)	250x100
LED Module Size WxH (inch)	9.84x3.94
LED Module Resolution	160x64
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	1.5-5m
LED Module Thickness	14mm
LED Module Weight	100g
Protection grade	IP40
Color Temperature	3200-9300K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Power Consumption	Max 580W/sqm, Typical 174W/sqm
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair