



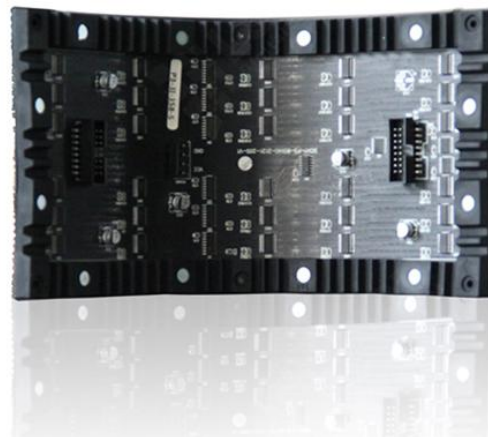

# UniFlex P1.8

- 800nit brightness, always bright in ambient lighting
- 1.5~5mm pixel pitch for option
- Magnetic soft module, easily mount to any shaped structure
- 5000:1 high contrast ratio, show perfect colors to customers
- 100g only per module, do not add weight to buildings

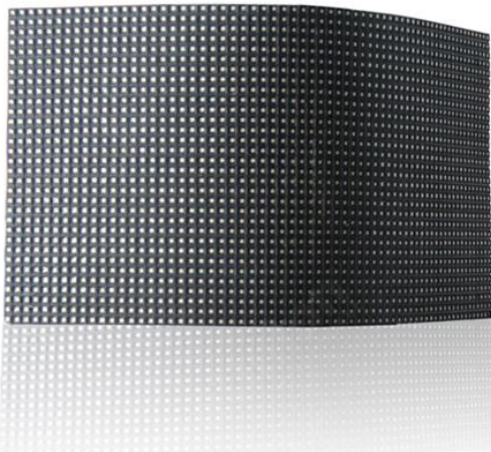

## Technical Specifications

Pixel Pitch	1.88mm
Pixel Configuration	SMD1515
Brightness	800nit
LED Module Size WxH (mm)	240x120
LED Module Size WxH (inch)	9.45x4.72
LED Module Resolution	128x64
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	1.8-6m
LED Module Thickness	14mm
LED Module Weight	100g
Protection grade	IP40
Color Temperature	3200-9300K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Power Consumption	Max 580W/sqm, Typical 174W/sqm
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair