



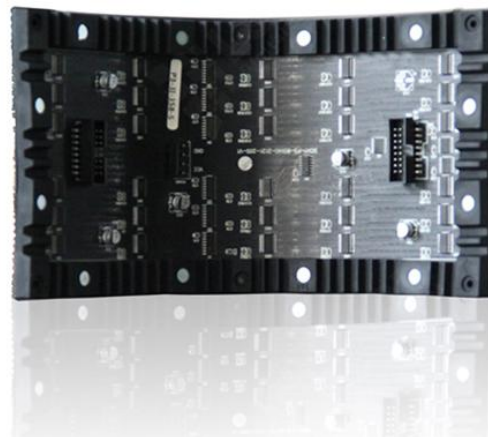

# UniFlex P2.5

- 800nit brightness, always bright in ambient lighting
- 1.5~5mm pixel pitch for option
- Magnetic soft module, easily mount to any shaped structure
- 5000:1 high contrast ratio, show perfect colors to customers
- 100g only per module, do not add weight to buildings

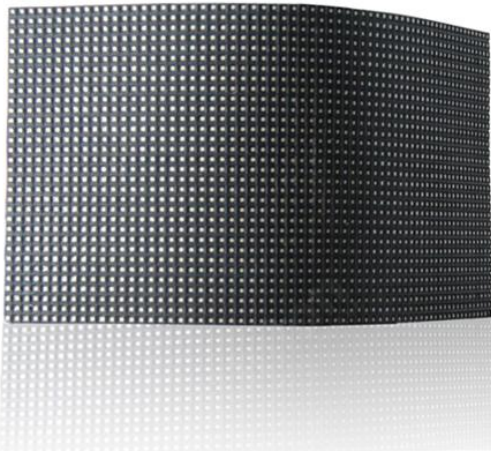

## Technical Specifications

|                                  |   |
|----------------------------------|---|
| Pixel Pitch                      | 2.5mm   |
| Pixel Configuration              | SMD1515   |
| Brightness                       | 800nit  |
| LED Module Size WxH (mm)         | 320x160   |
| LED Module Size WxH (inch)       | 12.6x6.3  |
| LED Module Resolution            | 128x64  |
| Horizontal Viewing Angle         | +/-70°  |
| Vertical Viewing Angle           | +/-70°  |
| Recommended Viewing Distance     | 2.5-8m  |
| LED Module Thickness             | 14mm  |
| LED Module Weight                | 100g  |
| Protection grade                 | IP40  |
| Color Temperature                | 3200-9300K Adjustable                             |
| Grey Scale                       | 16bit   |
| Contrast Ratio                   | 5000:1  |
| Video Frame Rate                 | 50/60Hz   |
| Refresh Rate                     | 1920Hz  |
| Power Consumption                | Max 580W/sqm, Typical 174W/sqm                    |
| Storage Temperature / Humidity   | -30~+60°C, 10~95%RH                               |
| Operating Temperature / Humidity | -20~+50°C, 10~90%RH                               |
| Maintenance                      | Front service                                     |
| Input Voltage                    | 100-240V AC                                       |
| Input Signal                     | DVI/HDMI/VGA/SDI/DP/AV/S-Video                    |
| Brightness Control               | Manual / Automatic                                |
| LED Lifetime                     | >100,000 Hours                                    |
| Service                          | Design, Configuration, Installation, Local repair |