


UniStage IN3.9

- 1000nit brightness, always bright in ambient lighting
- 3840Hz refresh rate, silky smooth image under camera
- Robust cabinet locks, max hanging 20pcs cabinets vertically
- 5000:1 high contrast ratio, bring the best viewing experience
- +/- 10 degrees arc available

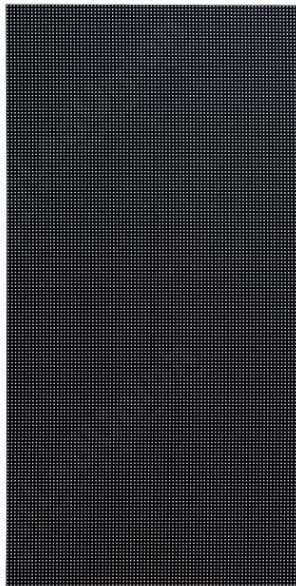

Technical Specifications

| | |
|----------------------------------|---|
| Pixel Pitch | 3.91mm |
| Pixel Configuration | SMD2020 |
| Brightness | 1000nit |
| LED Module Size WxH | 250x250mm |
| LED Cabinet Size WxHxD | 500x1000x85mm (500x500x85mm option) |
| Cabinet Resolution | 128x256 |
| Horizontal Viewing Angle | +/-70° |
| Vertical Viewing Angle | +/-70° |
| Recommended Viewing Distance | 4-12m |
| Cabinet Material | Die-casting aluminum |
| Cabinet Weight | 13.5kg |
| Protection grade | IP45 |
| Color Temperature | 2000-9500K Adjustable |
| Grey Scale | 16bit |
| Contrast Ratio | 5000:1 |
| Video Frame Rate | 50/60Hz |
| Refresh Rate | 3840Hz |
| Power Consumption | Max 600W/sqm, Typical 180W/sqm |
| Storage Temperature / Humidity | -30~+60 °C, 10~95%RH |
| Operating Temperature / Humidity | -20~+50 °C, 10~90%RH |
| Maintenance | Front or rear service |
| Input Voltage | 100-240V AC |
| Input Signal | DVI/HDMI/VGA/SDI/DP/AV/S-Video |
| Brightness Control | Manual / Automatic |
| LED Lifetime | >100,000 Hours |
| Service | Design, Configuration, Installation, Local repair |