


# UniStage EX3.9

- Max 5500nit brightness, 24/7 non-stop working
- 3840Hz refresh rate, silky smooth image under camera
- Robust cabinet locks, max hanging 20pcs cabinets vertically
- 5000:1 high contrast ratio, bring the best viewing experience
- +/- 10 degrees arc available

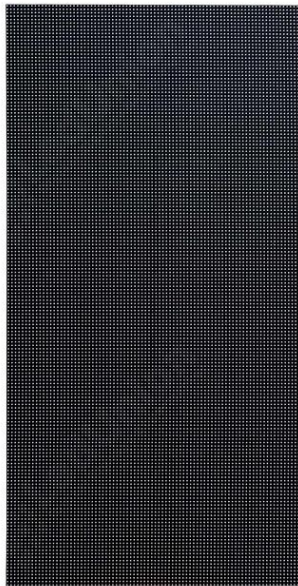

## Technical Specifications

Pixel Pitch	3.91mm
Pixel Configuration	SMD1921
Brightness	5000nit
LED Module Size WxH	250x250mm
LED Cabinet Size WxHxD	500x1000x85mm (500x500x85mm option)
Cabinet Resolution	128x256
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	4-12m
Cabinet Material	Die-casting aluminum
Cabinet Weight	14.5kg
Protection grade	IP65
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	3840Hz
Power Consumption	Max 700W/sqm, Typical 210W/sqm
Storage Temperature / Humidity	-30~+70°C, 10~95%RH
Operating Temperature / Humidity	-30~+60°C, 10~95%RH
Maintenance	Rear service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair