


UniStage EX5.9

- Max 5500nit brightness, 24/7 non-stop working
- 3840Hz refresh rate, silky smooth image under camera
- Robust cabinet locks, max hanging 20pcs cabinets vertically
- 5000:1 high contrast ratio, bring the best viewing experience
- +/- 10 degrees arc available

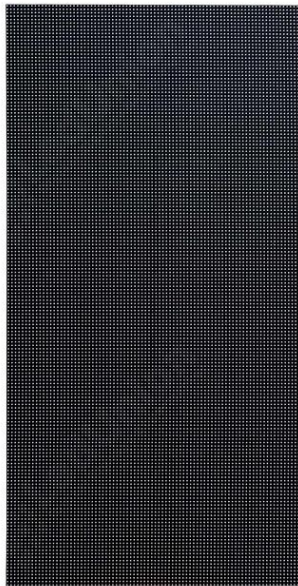

Technical Specifications

Pixel Pitch	5.95mm
Pixel Configuration	SMD1921
Brightness	5000nit
LED Module Size WxH	250x250mm
LED Cabinet Size WxHxD	500x1000x85mm (500x500x85mm option)
Cabinet Resolution	84x168
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	6-20m
Cabinet Material	Die-casting aluminum
Cabinet Weight	14.5kg
Protection grade	IP65
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	3840Hz
Power Consumption	Max 700W/sqm, Typical 210W/sqm
Storage Temperature / Humidity	-30~+70 °C, 10~95%RH
Operating Temperature / Humidity	-30~+60 °C, 10~95%RH
Maintenance	Rear service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair