




UniTriangle P4 Isosceles Right

- 1000nit brightness, always bright in ambient lighting
- 5000:1 color contrast, bring best color quality
- Magnetic front service, direct wall-mount installation
- Wall mount install, different shape structure available
- Smart phone APP control

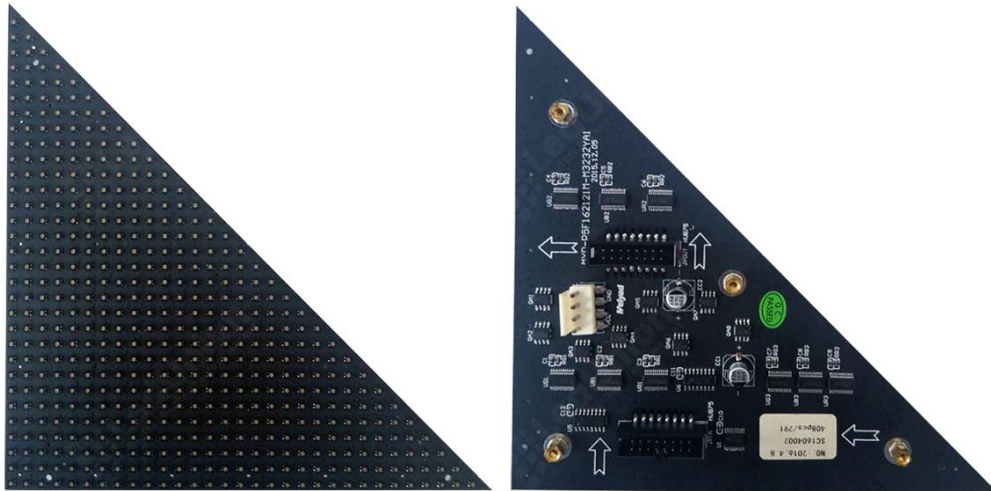

Technical Specifications

Pixel Pitch	4mm
Pixel Configuration	SMD2020
Pixel Density	62,500pix/sqm
Brightness	1000nit
LED Module Size Side x Side	229x229mm
LED Module Resolution	57x57
Driving Type	1/15
Weight	260g
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Viewing Distance	4-12m
Protection grade	IP40
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Typical LED Cabinet Size	Customizable
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair