




## UniTriangle P5 Isosceles Right

- 800nit brightness, always bright in ambient lighting
- 5000:1 color contrast, bring best color quality
- Magnetic front service, direct wall-mount installation
- Wall mount install, different shape structure available
- Smart phone APP control

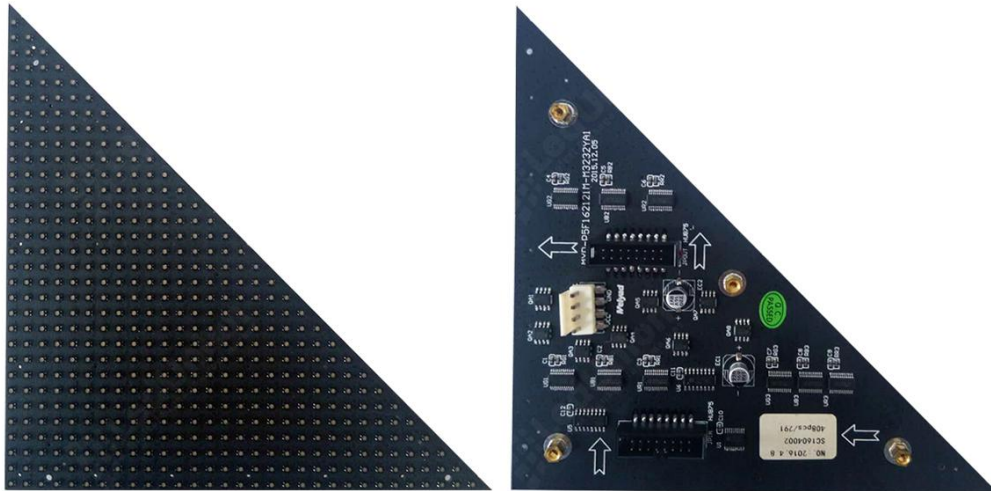

## Technical Specifications

Pixel Pitch	5mm
Pixel Configuration	SMD2020
Pixel Density	40,000pix/sqm
Brightness	800nit
LED Module Size Side x Side	160x160mm
LED Module Resolution	32x32
Driving Type	1/16
Weight	90g
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Viewing Distance	5-15m
Protection grade	IP30
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Typical LED Cabinet Size	Customizable
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair