




UniCircle P4

- 1000nit indoor, 4500nit outdoor, always bright in ambient light
- 5000:1 contrast ratio, bring best color quality to people
- Magnetic front service, easy to access and maintain
- 16mm ultra thin and light, save space, an artistic sign
- Smart phone APP control

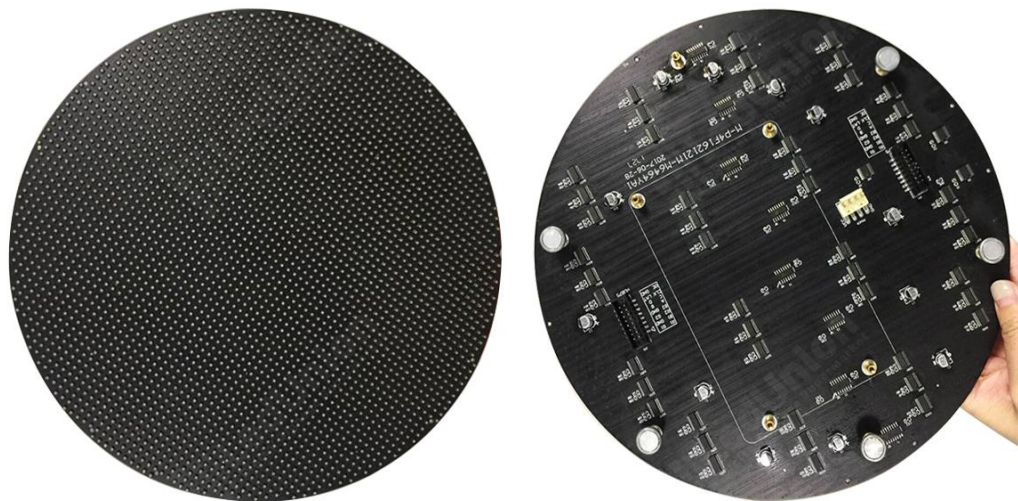

Technical Specifications

Pixel Pitch	4mm
Pixel Configuration	SMD2020
Pixel Density	62,500pix/sqm
Brightness	1000nit
LED Module Size diameter	256x256mm
LED Module Resolution	64x64
Driving Type	1/16
Weight	250g
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Viewing Distance	4-12m
Protection grade	IP40
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	3000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Typical LED Cabinet Size	Customizable
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair