


UniRibbon P5

- 1000nit brightness, always bright in ambient light
- 3840Hz refresh rate, silky smooth image under live camera
- Direct wall mount install, no need for structure
- Cable inner passing, no risk of accidental touch
- Customizable cabinet size

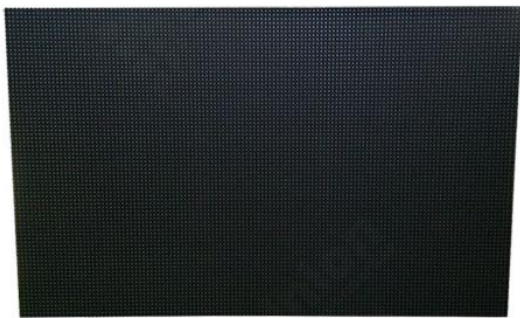

Technical Specifications

Pixel Pitch	5mm
Pixel Configuration	SMD2020
Brightness	1000nit
LED Module Size WxH	320x160mm
Typical LED Cabinet Size WxHxD	960x800x100mm (customizable)
Typical Cabinet Resolution	192x160
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	5-15m
Cabinet Material	Aluminum
Cabinet Weight	30kg
Protection grade	IP45
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	3840Hz
Power Consumption	Max 460W, Typical 138W
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair