


UniRibbon P6

- 1000~2500nit brightness, always bright in ambient light
- 3840Hz refresh rate, silky smooth image under live camera
- Direct wall mount install, no need for structure
- Cable inner passing, no risk of accidental touch
- Customizable cabinet size

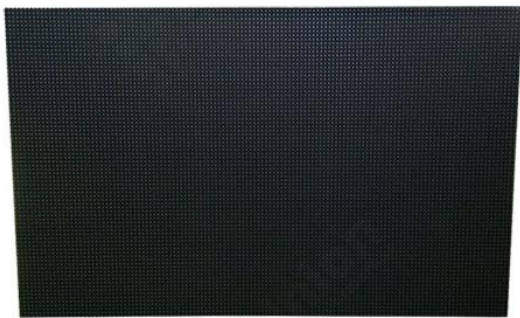

Technical Specifications

Pixel Pitch	6mm
Pixel Configuration	SMD2727
Brightness	1000~2500nit adjustable
LED Module Size WxH	192x192mm
Typical LED Cabinet Size WxHxD	960x768x100mm (customizable)
Typical Cabinet Resolution	160x128
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	6-20m
Cabinet Material	Aluminum
Cabinet Weight	30kg
Protection grade	IP45
Color Temperature	2000-9500K Adjustable
Grey Scale	16bit
Contrast Ratio	5000:1
Video Frame Rate	50/60Hz
Refresh Rate	3840Hz
Power Consumption	Max 440W, Typical 132W
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-20~+50°C, 10~90%RH
Maintenance	Front service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair