



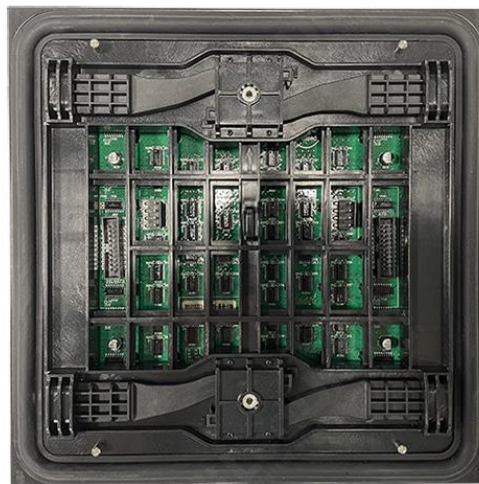

# UniModule EX3.1 Pro

- 5500nit brightness, 24/7 working in day and night
- 3.1~10mm pixel pitch for option
- Front serviceable, direct wall-mount installation
- Fast lock design, easy to access and maintain
- 5 years lifespan

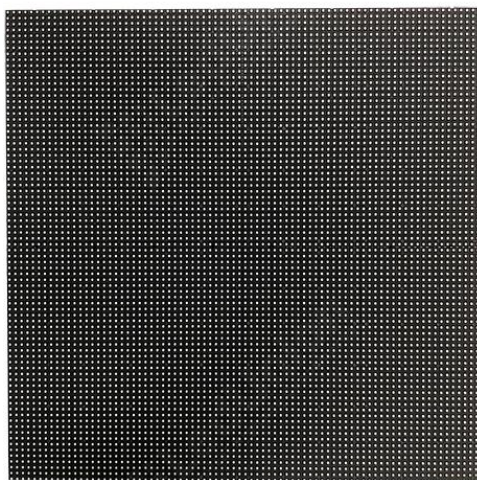

## Technical Specifications

Pixel Pitch	3.125mm
Pixel Configuration	SMD1415
Pixel Density	102,400pix/sqm
Brightness	5500nit
LED Module Size WxHxD	250x250x18mm
LED Module Resolution	80x80
Driving Type	1/10
Weight	900g
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Viewing Distance	3-10m
Protection grade	IP62
Color Temperature	3000-9500K Adjustable
Grey Scale	14bit
Contrast Ratio	3000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Storage Temperature / Humidity	-30~+70°C, 10~95%RH
Operating Temperature / Humidity	-30~+60°C, 10~95%RH
Maintenance	Front or rear service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair